



DeLaval Water trough PT

**Non-heated
version**

**Large
capacity**

**Robust
and easy
to install**

**Easy to
clean**

A standard robust plastic water trough without heating. The trough has a robust 42 L/min brass water valve for high performance. Max water pressure: 3-4 bar. A protection bar is available as an accessory and should always be used to prevent cows stepping into the trough. Available in two lengths.

DeLaval


Water trough PT



Adjustable brass valve

Heating element
for water valve
as accessory

Valve cover

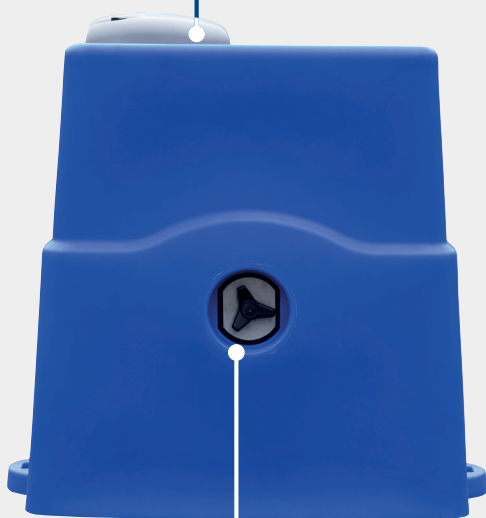

Drainage plug

Suitable in insulated barns or where the temperature doesn't go below freezing degrees during winter. This trough is also available in a heated version, called HPT.

Measurements

Length	PT185: 2400 mm PT250: 3650 mm
Width	650 mm
Height	675 mm

Number of cows:

PT185: Up to 24 dairy cows
PT250: Up to 36 dairy cows

Winter proof:

Recommended for use in a frost free climate. Consider the water valve heater option for more peace of mind during winter.

Works well with DeLaval barn equipment

Explore our range of other products supporting animal welfare in the barn, including our comfort bed range, effluent system and cow brushes.